GUARANTEE

From the moment your Geemarc product is purchased, Geemarc guarantee it for the period of one year. During this time, all repairs or replacements (at our discretion) are free of charge. Should you experience a problem then contact our helpline or visit our website at www.geemarc.com. The guarantee does not cover accidents, negligence or breakages to any parts. The product must not be tampered with or taken apart by anyone who is not an authorised Geemarc representative. The Geemarc guarantee in no way limits your legal rights.

IMPORTANT: YOUR RECEIPT IS PART OF YOUR GUARANTEE AND MUST BE RETAINED AND PRODUCED IN THE EVENT OF A WARRANTY CLAIM Please note: The guarantee applies to the United Kingdom only.

DECLARATION: Geemarc Telecom SA hereby declares that this product is in compliance with the essential requirements and other relevant provisions of the Radio and Telecommunications Terminal Equipment Directive 1999/5/EEC and in particular article 3 section 1a, 1b and section 2.

The declaration of conformity may be consulted at <u>www.geemarc.com</u>

Telephone connection: Voltages present on the telecommunication network are classified TNV-3 (Telecommunication Network Voltage) according to the EN60950 standard.

RECYCLING DIRECTIVES

The WEEE (Waste Electrical and Electronic Equipment) has been put in place for the products in end of life are recycled in the best way. When this product is out of order, please do not put it in your domestic waste bin. Please use one of the following disposal options:

- Remove the batteries and deposit them in an appropriate WEEE skip. Deposit the product in a appropriate WEEE skip.
- Or hand the old product to the retailer. If you purchase a new one, they should accept it .

Thus if you respect these instructions you ensure human health and environmental protection.


Beemarc™ TRIMLINE
Hear the Difference



USER GUIDE

Please read this User Guide carefully in order to get the very best results from your telephone.

UGTRIMLINE V1.2

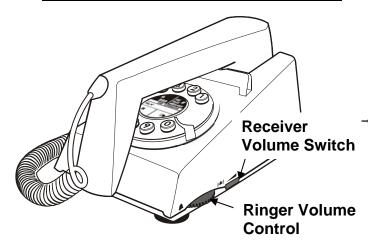

1 - CONNECTING TELEPHONE

The plug at the end of the lead should be connected to the telephone socket.

Voltages present on the telecommunication network Are classified TNV-3 (Telecommunication Network Voltage) according to the EN60950 standard.

2 - RINGER SETTING

The rotary volume control can be used to adjust the ringer level. Turn anti-clockwise to increase and clockwise to reduce the ringer volume. Turning to the extreme clockwise position switches the ringer **OFF**.

3 - WALL MOUNTING

To wall-mount your telephone, pull out the clip to the wall mounting position (located in the base unit, just below the ear piece). This will ensure that the handset stays firmly in position. Make 2 holes in the wall 135mm apart, insert the wall plugs and the wall mounting screws. The screws should protrude from wall by 10 mm. Place the phone onto the screw-heads and slide down to secure.

USING THE TELEPHONE:

1 - ANSWERING INCOMING CALLS

When an incoming call is received, the telephone will ring. To answer the call lift the handset and speak.

2- RECEIVER VOLUME SWITCH

The receiver volume switch ____ can be used to **Normal** or increase the receiving level to **High**.

3- MAKING A CALL

Lift the handset, await the dial tone and dial the required number using the push button keypad. On completion of the call, carefully replace the handset in the cradle.

4- LAST NUMBER REDIAL

If the number you have dialled is engaged or if you want to repeat the call to the number you dialled previously, lift the handset, await dial tone and press the (Redial) button. The previously dialled number will be AUTOMATICALLY RE-DIALLED.

5- R. * & # BUTTONS

These are used with new services provided on digital exchanges. For details contact your network operator.



For product support and help visit our website at www.geemarc.com

telephone 01707 384438 or fax 01707 832529

Wall mount template 135mm